


Alumil


SMARTIA MD67

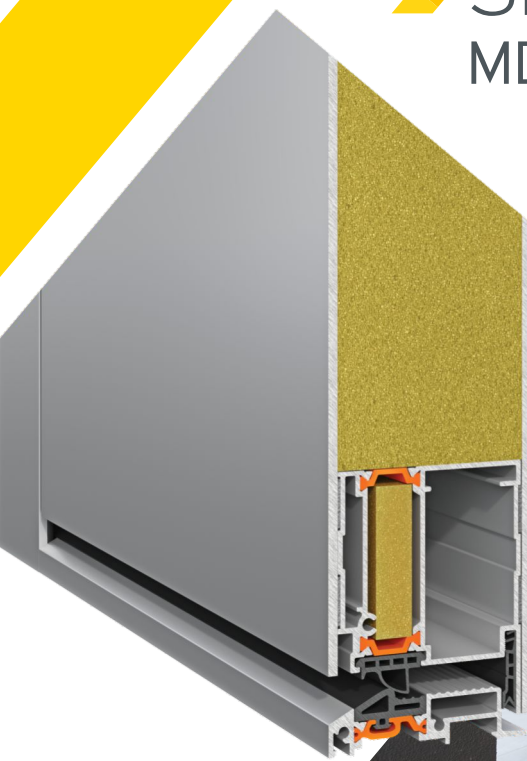

INSULATED ENTRANCE DOORS SYSTEM

SMARTIA MD67 is ALUMIL's new system for quality main entrance doors. Distinguished for its modern design and its high performance, the system provides the ability to create entrance doors with panels or glazing infills. The special double-sided coplanar design provides unique entrance doors with an exceptional aesthetic value.

- Basic depth of system: 67mm.
- Low threshold of almost 16 mm height with slip-resistant design.
- High level of thermal insulation up to $U_f = 1.97 \text{ W/m}^2\text{K}$.
- Designed for various entrance door typologies.
- Wide variety of security locks and hinges (concealed, barrel or surface mounted).
- High level of water tightness.
- Outstanding insulated panel which is coplanar on both sides, with a width of 67 mm, for exceptional design, advanced thermal insulation and high security level.

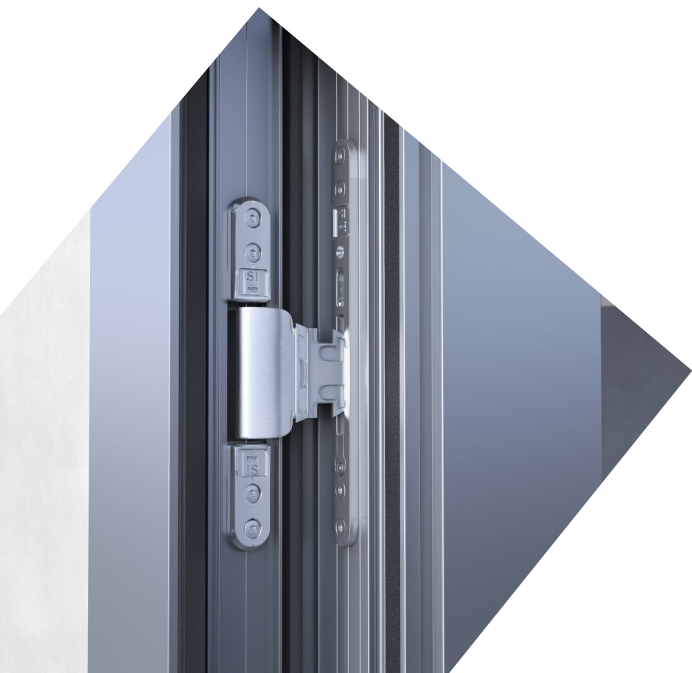





TECHNICAL CHARACTERISTICS

Frame width	67 mm
Sash width	67 mm
Minimum visible width	117 mm
Minimum visible width T-profile	85 mm
Sash weight	up to 220 Kg
Glazing panel	from 17 up to 50 mm
Insulation	Polyamides 20 & 24 mm width, Insulation foam & ALUMIL Energy Bar


TYOLOGIES




Single leaf door




Double leaf door




Single leaf door
with insulation panel




Double leaf door
with insulation panel




Single leaf door
with insulation panel
and fixed light



Single leaf door
with insulation panel,
fanlight and fixed lights



Single leaf door
with fixed light



Single leaf door
with fanlight and fixed lights

CERTIFICATES



Air permeability EN 1026, EN12207

CLASS 4



Watertightness EN 1027, EN 12208

CLASS E1350



Resistance to wind load EN 12210, EN 12211

CLASS C4/B4



Burglar resistance EN 1627-1630

RC2



Sound reduction EN 14351, EN 717

R_w (C;Ctr) = 42 (-2;-6) dB



Thermal Insulation EN 10077-2

U_f from 1,97 to 3,15 W/m²K

ALUMIL SA

KILKIS INDUSTRIAL AREA

GR 61 100, KILKIS

TEL: +30 23410 79300

FAX: +30 23410 71988

www.alumil.com