

Alumil

SMARTIA M78



CURTAIN WALL UNITIZED SYSTEM


SMARTIA M78 is a cost efficient unitized curtain wall, which combines minimal aesthetics with structural robustness.

Its Structural Silicone Glazing construction offers maximum transparency at the external surface of the façade.

Modular units, including glazing panes, are prefabricated in workshop conditions and this results in a fast and economic installation with minimum manpower and tooling requirements.

This construction mode, renders M78 an ideal system for high rise buildings, where meeting demanding deadlines is a prerequisite.

- Basic system width 78mm
- Structurally bonded glazing, providing a flush exterior appearance.
- Various hinged typologies can be implemented: projected, parallel projected and all and turn windows.
- Horizontal unit joint 12mm
- Vertical unit joint 19mm
- Stack joint height 92mm
- 3 levels of sealing
- Glazing from 32 mm up to 46mm

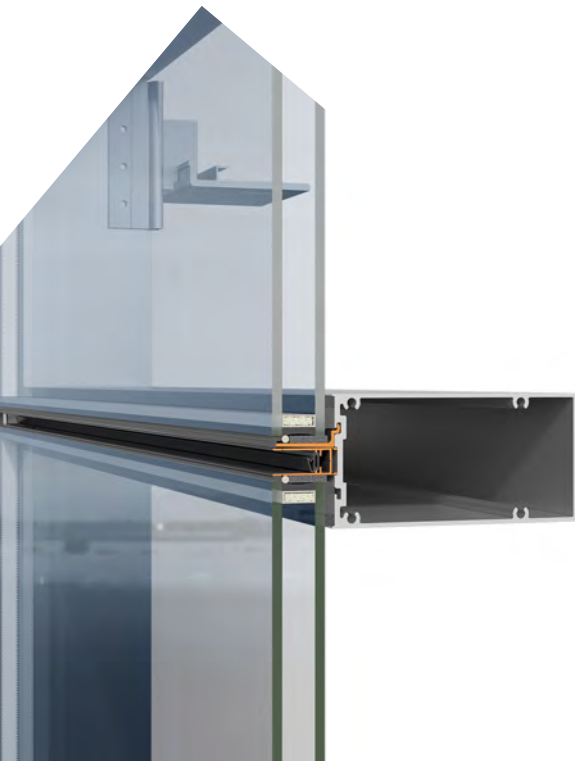





TECHNICAL CHARACTERISTICS

Exterior visible width	78 mm
Mullion depth	160 mm
Transom width	160 mm
Mullion moments of Inertia	$I_x=643\text{cm}^4$ $I_y=46\text{cm}^4$
Transom moments of Inertia	$I_x=161\text{cm}^4$ $I_y=568\text{cm}^4$
Maximum dimensions WxH	1500 x 3500 mm


TYOLOGIES




Fixed



Project window








Parallel Projected
Window







Tilt and turn window

CERTIFICATES

	Air permeability EN 12152	CLASS AE 750
	Watertightness EN 12154	CLASS RE 1200
	Resistance to wind load EN 13116	Design Load $\pm 2 \text{ KN/m}^2$ Safety Load $\pm 3 \text{ KN/m}^2$
	Impact Resistance EN14019	I5/E5
	Θερμομόνωση EN 12631	U_i from 2,1 to 2,5W/m ² K



	Air permeability EN 12152	CLASS AE 750
	Watertightness EN 12154	CLASS RE 1200
	Resistance to wind load EN 13116	Design Load $\pm 2 \text{ KN/m}^2$ Safety Load $\pm 3 \text{ KN/m}^2$
	Impact Resistance EN14019	I5/E5



CWCT-Standard test methods for building envelopes

ALUMIL SA
KILKIS INDUSTRIAL AREA
GR 61 100, KILKIS
TEL: +30 23410 79300
FAX: +30 23410 71988
www.alumil.com