

ALUMIL

SMARTIA M15000




SISTEM BATANT FARA RUPERE DE PUNTE TERMICA



SMARTIA M15000 este un sistem complet de tamplarie batanta fara rupere de punte termica, destinat realizarii tuturor tipologiilor de usi si ferestre ce au urmatoarele caracteristici:

- Latime de baza a sistemului 50 mm.
- Grosimea geamului termoizolant de pana la 47 mm si greutatea cercevei de pana la 180 kg
- Sistem robust si flexibil, cu care se pot realiza toate tipologiile de usi, ferestre batante si ferestre pivotante.
- Posibilitatea realizarii de usi pentru caile de acces, etanse la fum, precum si usi antipanică.
- Sistemul dispune de profile pentru tipologiile cu cerceva ascusa
- Gama variata de profile (cu aspect drept, rotunjit, tesit, clasic)
- Sistemul poate utiliza atat mecanisme pentru camera europeana, cat si mecanisme de 16 mm (Euronut)
- Performante certificate de catre Institutul IFT Rosenheim.




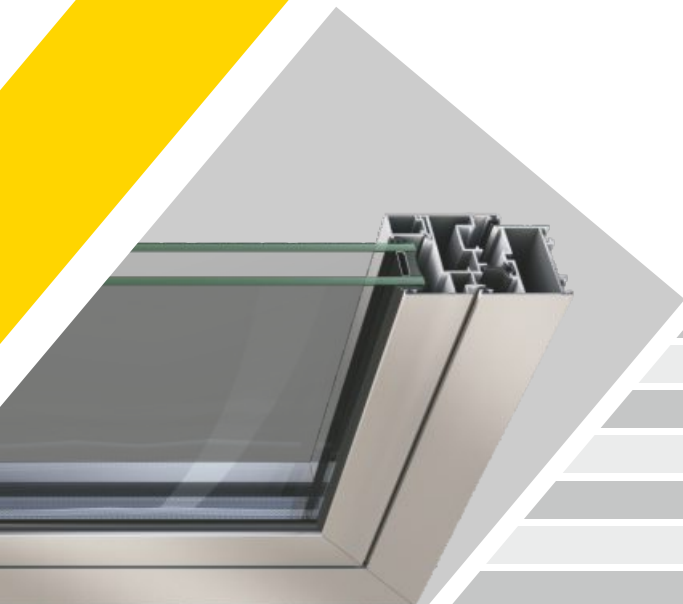

CARACTERISTICI TEHNICE

Aluminiu vizibil	137 mm
Inaltime tocului	48 mm
Latimea tocului	50 mm
Inaltimea cercevelei	66 mm
Latimea cercevelei	59 mm
Greutate per canat	pana la 130 Kg
Sticla	pana la 47 mm

TIPOLOGII

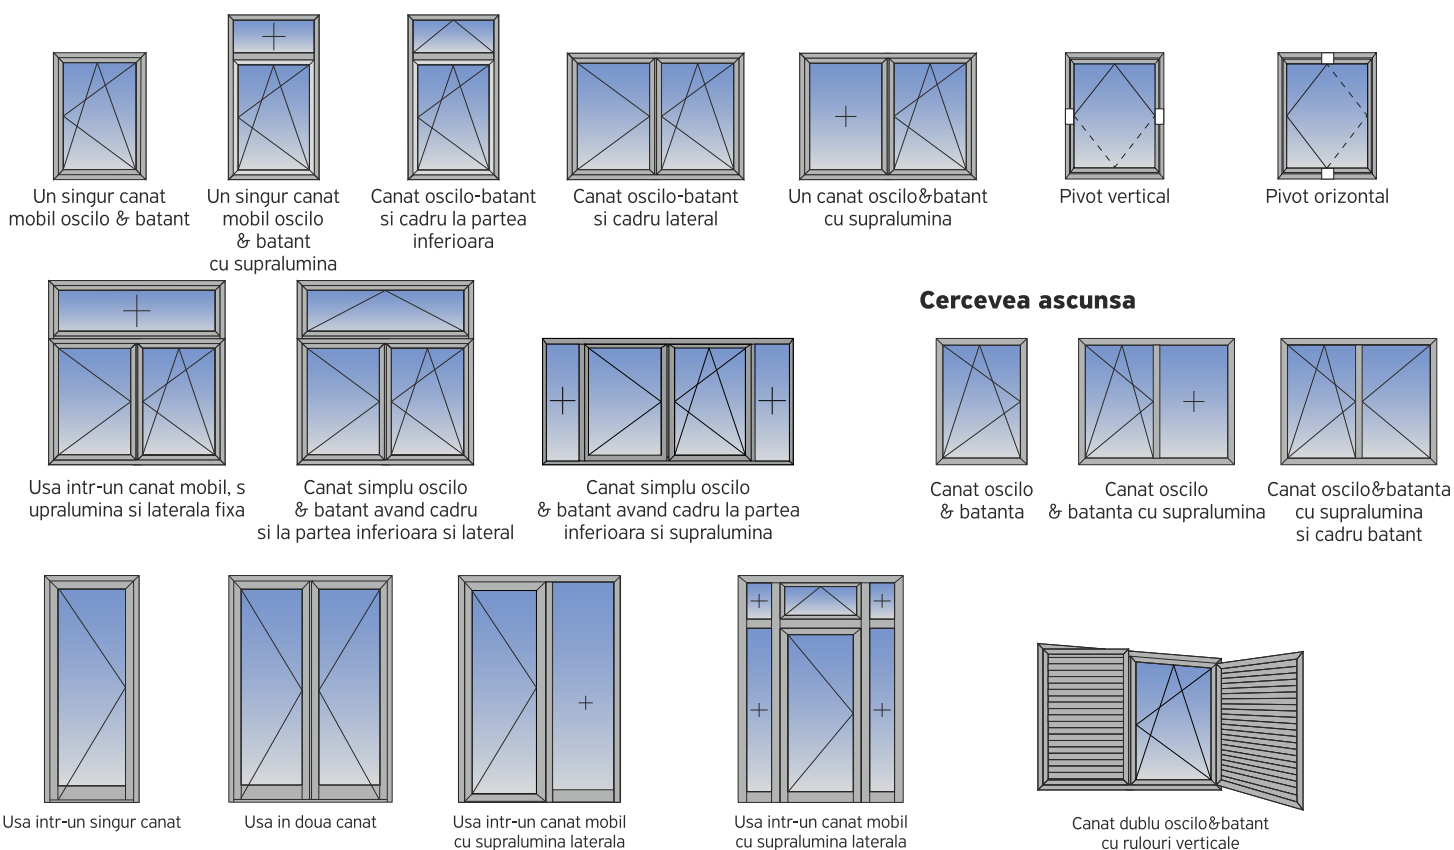

CERTIFICARI

	Permeabilitatea la aer EN 1026, EN 12207	CLASA 4
	Etanseitatea la apa EN 1027, EN 12208	CLASA E 1050
	Rezistenta la incarcările de vant EN 12210, EN 12211	CLASA C5
	Anti-efractie EN 1627-1630	WK2

ALUMIL RO

Sos. Bucuresti-Ploiesti 42-44, Corp A1
Baneasa Business and Technology Park
Sector 1, Bucuresti, Romania
TEL: +40 21 424 3456
FAX: +40 214 233 932

office@alumil.ro
www.alumil.com